M12

螺纹防水连接器

产品规格 /Product specifications

芯数 Number of contacts	4芯		5芯		8芯	12芯	17芯
防插错编码 Ant insertion error coding	A	D	A	B	A	A	A
额定电压 Rated voltage	250V	250V	60V	60V	30V	30V	30V
标准电流 Rated current	4A	4A	4A	4A	2A	1.5A	1.5A
绝缘体正面图 Contactfaceview							

芯数 Number of contacts	8芯		6芯	3(2+PE)芯	4(3+PE)芯	4芯	5(4+PE)芯	
防插错编码 Ant insertion error coding	X	Y	Y	S	S	T	L	K
额定电压 Rated voltage	50V AC/	30V	50V	630V	630V	60V	63V	630V
标准电流 Rated current	0.5A	0.5A/6A	0.5A/12A	16A	12A	12A	16A	16A
绝缘体正面图 Contactfaceview								

产品参数 /Product parameters

额定冲击电压V Rated impulse voltage	500V,800V,1500V,2500V
防护等级 Degree of protection	IP67
连接截面 Wire gouge	0.14mm²(AWG 26) .0.25mm²(AWG 26)
工作温度 temperature	-40° C ~ +85° C
触点电阻 mΩContact resistance	≤ 3mΩ
机械寿命 Mechanical operation	>500 插拔周期 /mating cycles
过电保护等级 Over volt uge categorie	II
绝缘组别 Materinl group	II
污染等级 Pollution degree	3
外壳材料 Material of housing	CuZn（黄铜镀镍 /Brass nickel plated）
插座材料 Material of contact body	PA
触点材料 Material ot contact	CuZn（黄铜镀金 /Brass gold plated）

产品命名规则 /Product Naming Rules

INT13-M12-H-08-A-01-C

- 产品项目编码
- 产品螺纹代号
- 产品类别代号
- 产品芯数
- 产品键位
- 流水号
- 识别码

▶ 全塑料浇铸电缆插头，针端，非屏蔽，焊接式
All-plastic cast cable plug, pin-end, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
3	A	INT13-M12-LS03A01
4	A	INT13-M12-LS04A01
5	A	INT13-M12-LS05A01
8	A	INT13-M12-LS08A01
12	A	INT13-M12-LS12A01
17	A	INT13-M12-LS17A01

▶ 全塑料浇铸电缆插头，孔端，非屏蔽，焊接式
All-plastic cast cable plug, hole-end, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
3	A	INT13-M12-LS03A02
4	A	INT13-M12-LS04A02
5	A	INT13-M12-LS05A02
8	A	INT13-M12-LS08A02
12	A	INT13-M12-LS12A02
17	A	INT13-M12-LS17A02

▶ 浇铸电缆插头，针端，非屏蔽，焊接式
Cast cable plugs, pin-end, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
3	A	INT13-M12-LT03A01
4	A	INT13-M12-LT04A01
5	A	INT13-M12-LT05A01
8	A	INT13-M12-LT08A01
12	A	INT13-M12-LT12A01
17	A	INT13-M12-LT17A01

▶ 浇铸电缆插头，孔端，非屏蔽，焊接式
Cast cable plugs, hole ends, unshielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
3	A	INT13-M12-LT03A02
4	A	INT13-M12-LT04A02
5	A	INT13-M12-LT05A02
8	A	INT13-M12-LT08A02
12	A	INT13-M12-LT12A02
17	A	INT13-M12-LT17A02

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	A	INT13-M12-LT05A03
8	A	INT13-M12-LT08A03
12	A	INT13-M12-LT12A03
17	A	INT13-M12-LT17A03

▶ 浇铸电缆插头，孔端，非屏蔽，焊接式
Cast cable plugs,hole ends, unshielded,soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	A	INT13-M12-LT05A04
8	A	INT13-M12-LT08A04
12	A	INT13-M12-LT12A04
17	A	INT13-M12-LT17A04

▶ 浇铸电缆插头，孔端，非屏蔽，焊接式
Cast cable plugs,hole ends, unshielded,soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	A	INT13-M12-LT05A06
8	A	INT13-M12-LT08A06
12	A	INT13-M12-LT12A06
17	A	INT13-M12-LT17A06

▶ 浇铸电缆插头，针端，非屏蔽，焊接式
Cast cable plugs, pin-end, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	A	INT13-M12-LT05A07
8	A	INT13-M12-LT08A07
12	A	INT13-M12-LT12A07
17	A	INT13-M12-LT17A07

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
3	A	INT13-M12-T03A01
4	A	INT13-M12-T04A01
5	A	INT13-M12-T05A01
8	A	INT13-M12-T08A01
12	A	INT13-M12-T12A01
17	A	INT13-M12-T17A01

▶ 浇铸电缆插头，孔端，屏蔽，焊接式
Cast cable plugs, hole ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
3	A	INT13-M12-T03A02
4	A	INT13-M12-T04A02
5	A	INT13-M12-T05A02
8	A	INT13-M12-T08A02
12	A	INT13-M12-T12A02
17	A	INT13-M12-T17A02

▶ 组装插头，针端，非屏蔽，焊接式
Assembled plug, pin-ended, unshielded, soldered



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	4.0-6.0	INT13-M12-R04A01
5	A	4.0-6.0	INT13-M12-R05A01
8	A	4.0-6.0	INT13-M12-R08A01
12	A	4.0-6.0	INT13-M12-R12A01
17	A	4.0-6.0	INT13-M12-R17A01

▶ 组装插头，孔端，非屏蔽，焊接式
Assembled plug, hole-ended, unshielded, soldered



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	4.0-6.0	INT13-M12-R04A02
5	A	4.0-6.0	INT13-M12-R05A02
8	A	4.0-6.0	INT13-M12-R08A02
12	A	4.0-6.0	INT13-M12-R12A02
17	A	4.0-6.0	INT13-M12-R17A02

▶ 现场组装插头，针端，非屏蔽，螺钉连接，直头
Field assembled plugs, pin ends, unshielded, screw connections, straight ends



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-H04A01C
5	A	6.0-8.0	INT13-M12-H05A01C
8	A	6.0-8.0	INT13-M12-H08A01C
4	A	4.0-6.0	INT13-M12-H04A01D
5	A	4.0-6.0	INT13-M12-H05A01D
8	A	4.0-6.0	INT13-M12-H08A01D

▶ 现场组装插头，孔端，非屏蔽，螺钉连接，直头
Field assembled plugs, hole ends, unshielded, screw connections, straight ends



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-H04A02C
5	A	6.0-8.0	INT13-M12-H05A02C
8	A	6.0-8.0	INT13-M12-H08A02C
4	A	4.0-6.0	INT13-M12-H04A02D
5	A	4.0-6.0	INT13-M12-H05A02D
8	A	4.0-6.0	INT13-M12-H08A02D

▶ 浇铸电缆插头，针端，焊接式
Cast cable plugs, pin-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	L	INT13-M12-LT05L01

▶ 浇铸电缆插头，孔端，焊接式
Cast cable plugs, hole-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	L	INT13-M12-LT05L02

▶ 浇铸电缆插头，针端，焊接式
Cast cable plugs, pin-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	K	INT13-M12-LT05K01

▶ 浇铸电缆插头，孔端，焊接式
Cast cable plugs, hole-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	K	INT13-M12-LT05K02

▶ 浇铸电缆插头，针端，焊接式
Cast cable plugs, pin-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	T	INT13-M12-LT04T01

▶ 浇铸电缆插头，孔端，焊接式
Cast cable plugs, hole-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	T	INT13-M12-LT04T02

▶ 浇铸电缆插头，针端，焊接式
Cast cable plugs, pin-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	S	INT13-M12-LT04S01

▶ 浇铸电缆插头，孔端，焊接式
Cast cable plugs, hole-end, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	S	INT13-M12-LT04S02

▶ 浇铸电缆插头，孔端，屏蔽，焊接式
Cast cable plugs, hole ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-T04A06
5	A	INT13-M12-T05A06

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-T04A07
5	A	INT13-M12-T05A07
8	A	INT13-M12-T08A07
12	A	INT13-M12-T12A07
17	A	INT13-M12-T17A07
4	B	INT13-M12-T04B07
5	B	INT13-M12-T05B07
4	D	INT13-M12-T04D07
5	D	INT13-M12-T05D07

▶ 浇铸电缆插头，孔端，屏蔽，焊接式
Cast cable plugs, hole ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-T04A08
5	A	INT13-M12-T05A08
8	A	INT13-M12-T08A08
12	A	INT13-M12-T12A08
17	A	INT13-M12-T17A08
4	B	INT13-M12-T04B08
5	B	INT13-M12-T05B08
4	D	INT13-M12-T04D08
5	D	INT13-M12-T05D08

▶ 全金属现场组装插头，针端，屏蔽，螺钉连接
All-metal field assembly plug, needle end, shield, screw connection



针数 Cant acts	编码 Coding	订货号 Ordering-No.
2	A	INT13-M12-KT02A01
3	A	INT13-M12-KT03A01
4	A	INT13-M12-KT04A01
5	A	INT13-M12-KT05A01
8	A	INT13-M12-KT08A01
3	B	INT13-M12-KT03B01
4	B	INT13-M12-KT04B01
3	D	INT13-M12-KT03D01
4	D	INT13-M12-KT04D01

▶ 全金属现场组装插头，孔端，屏蔽，螺钉连接
All-metal field assembly plug, hole end, shield, screw connection



针数 Cant acts	编码 Coding	订货号 Ordering-No.
2	A	INT13-M12-KT02A02
3	A	INT13-M12-KT03A02
4	A	INT13-M12-KT04A02
5	A	INT13-M12-KT05A02
8	A	INT13-M12-KT08A02
3	B	INT13-M12-KT03B02
4	B	INT13-M12-KT04B02
3	D	INT13-M12-KT03D02
4	D	INT13-M12-KT04D02

▶ 组装插头，针端，屏蔽，螺钉连接
Field-assembled plugs, pin ends, shielded, screw connection



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	S	6.0-8.0	INT13-M12-H04S01
4	T	6.0-8.0	INT13-M12-H04T01

▶ 组装插头，孔端，屏蔽，螺钉连接
Field-assembled plugs, hole ends, shielded, screw connection



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	S	6.0-8.0	INT13-M12-H04S02
4	T	6.0-8.0	INT13-M12-H04T02

▶ 全金属现场组装插头，针端，屏蔽，焊接式，直头
All-metal field-assembled plugs, pin ends, shielded, soldered, straight



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-ZH04A01
5	A	6.0-8.0	INT13-M12-ZH05A01
8	A	6.0-8.0	INT13-M12-ZH08A01
12	A	6.0-8.0	INT13-M12-ZH12A01
17	A	6.0-8.0	INT13-M12-ZH17A01

▶ 全金属现场组装插头，孔端，屏蔽，焊接式，直头
All-metal field-assembled plugs, hole ends, shielded, welded, straight



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-ZH04A02
5	A	6.0-8.0	INT13-M12-ZH05A02
8	A	6.0-8.0	INT13-M12-ZH08A02
12	A	6.0-8.0	INT13-M12-ZH12A02
17	A	6.0-8.0	INT13-M12-ZH17A02

▶ 全金属现场组装插头，针端，屏蔽，压接式，直头
All-metal field-assembled plugs, pin ends, shielded, crimped, straight



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-Y04A01
5	A	6.0-8.0	INT13-M12-Y05A01
8	A	6.0-8.0	INT13-M12-Y08A05
4	D	6.0-8.0	INT13-M12-Y04D01
8	X	6.0-8.0	INT13-M12-Y08X05
8	X	6.0-8.0	INT13-M12-Y08X03C-01

▶ 全金属现场组装插头，孔端，屏蔽，压接式，直头
All-metal field-assembled plugs, hole ends, shielded, crimped, straight



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-Y04A02
8	A	6.0-8.0	INT13-M12-Y08A02
4	D	6.0-8.0	INT13-M12-Y04D02
8	X	6.0-8.0	INT13-M12-Y08X02

▶ 现场组装插头，针端，屏蔽，压接式，直头，推拉自锁式
Field assembled plugs, pin ends, shielded, crimp, straight, push-pull self-locking



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	D	6.0-8.0	INT13-M12-PY04D01
8	X	6.0-8.0	INT13-M12-PY08X01

▶ 全金属现场组装插头，针端，屏蔽，焊接式，直头
All-metal field-assembled plugs, pin ends, shielded, soldered, straight



针数 Cant acts	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
10	6.0-8.0	INT13-M12-Y1001

▶ 全塑料组装插头，针端，焊接式，直头
All-plastic assembled plug, pin ends, soldered, straight



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-RH04A01
5	A	6.0-8.0	INT13-M12-RH05A01
4	D	6.0-8.0	INT13-M12-RH04D01
5	D	6.0-8.0	INT13-M12-RH05D01

▶ 全塑料组装插头，孔端，焊接式，直头
All-plastic assembled plug, hole ends, welded, straight



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-RH04A02
5	A	6.0-8.0	INT13-M12-RH05A02
4	D	6.0-8.0	INT13-M12-RH04D02
5	D	6.0-8.0	INT13-M12-RH05D02

▶ 现场组装插头，针端，非屏蔽，弯头，螺钉连接
Field assembled plugs, pin ends, unshielded, elbowed, screw connections



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-WT04A01C
5	A	6.0-8.0	INT13-M12-WT05A01C
8	A	6.0-8.0	INT13-M12-WT08A01C
4	B	6.0-8.0	INT13-M12-WT04B01C
5	B	6.0-8.0	INT13-M12-WT05B01C
4	D	6.0-8.0	INT13-M12-WT04D01C
5	D	6.0-8.0	INT13-M12-WT05D01C

▶ 现场组装插头，针端，非屏蔽，弯头，螺钉连接
Field assembled plugs, pin ends, unshielded, elbowed, screw connections



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	4.0-6.0	INT13-M12-WT04A01D
5	A	4.0-6.0	INT13-M12-WT05A01D
8	A	4.0-6.0	INT13-M12-WT08A01D
4	B	4.0-6.0	INT13-M12-WT04B01D
5	B	4.0-6.0	INT13-M12-WT05B01D
4	D	4.0-6.0	INT13-M12-WT04D01D
5	D	4.0-6.0	INT13-M12-WT05D01D

▶ 现场组装插头，孔端，非屏蔽，弯头，螺钉连接
Field assembled plugs, hole ends, unshielded, elbowed, screw connections



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-WT04A02C
5	A	6.0-8.0	INT13-M12-WT05A02C
8	A	6.0-8.0	INT13-M12-WT08A02C
4	B	6.0-8.0	INT13-M12-WT04B02C
5	B	6.0-8.0	INT13-M12-WT05B02C
4	D	6.0-8.0	INT13-M12-WT04D02C
5	D	6.0-8.0	INT13-M12-WT05D02C

▶ 现场组装插头，孔端，非屏蔽，弯头，螺钉连接
Field assembled plugs, hole ends, unshielded, elbowed, screw connections



针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	4.0-6.0	INT13-M12-WT04A02D
5	A	4.0-6.0	INT13-M12-WT05A02D
8	A	4.0-6.0	INT13-M12-WT08A02D
4	B	4.0-6.0	INT13-M12-WT04B02D
5	B	4.0-6.0	INT13-M12-WT05B02D
4	D	4.0-6.0	INT13-M12-WT04D02D
5	D	4.0-6.0	INT13-M12-WT05D02D

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange seat, hole end, shielded, PCB board mount

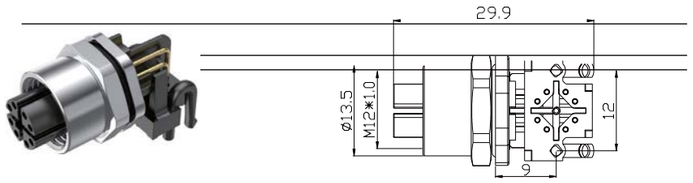

针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-WZ08X02A

▶ 前锁弯角插座，孔端，非屏蔽，PCB 板接式
Front lock angled receptacle, hole end, unshielded, PCB board mount

针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-WZ04D04

▶ 前锁弯角插座，孔端，非屏蔽，PCB 板接式
Front lock angled receptacle, hole end, unshielded, PCB board mount

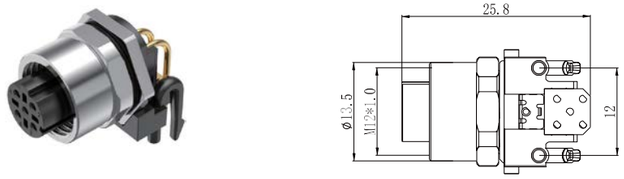

针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-WZ04D08
5	D	INT13-M12-WZ05D08

▶ 全金属现场组装插头，针端，屏蔽，压接式，弯头
All-metal field-assembled plugs, pin ends, shielded, crimp-on, elbowed

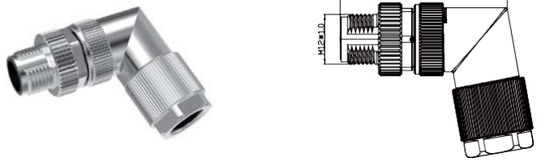

针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-WY04A03
4	D	6.0-8.0	INT13-M12-WY04D03
8	X	6.0-8.0	INT13-M12-WY08X03

▶ 全金属现场组装插头，针端，屏蔽，弯头，螺钉连接
All-metal field assembled plugs, pin ends, shielded, elbowed, screw connections

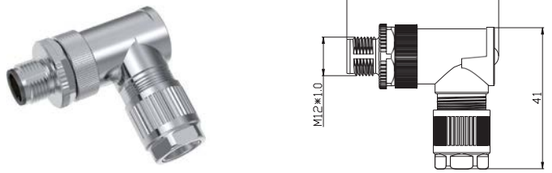

针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-KWT04A01
5	A	6.0-8.0	INT13-M12-KWT05A01
8	A	6.0-8.0	INT13-M12-KWT08A01
4	B	6.0-8.0	INT13-M12-KWT04B01
5	B	6.0-8.0	INT13-M12-KWT05B01
4	D	6.0-8.0	INT13-M12-KWT04D01
5	D	6.0-8.0	INT13-M12-KWT05D01

▶ 现场组装插头，孔端，屏蔽，螺钉连接
Field assembled plugs, hole ends, shields, elbows, screw connections

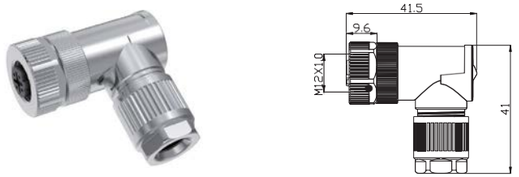

针数 Cant acts	编码 Coding	电缆出口直径 Cabel outlet(mm)	订货号 Ordering-No.
4	A	6.0-8.0	INT13-M12-KWT04A02
5	A	6.0-8.0	INT13-M12-KWT05A02
8	A	6.0-8.0	INT13-M12-KWT08A02
4	B	6.0-8.0	INT13-M12-KWT04B02
5	B	6.0-8.0	INT13-M12-KWT05B02
4	D	6.0-8.0	INT13-M12-KWT04D02
5	D	6.0-8.0	INT13-M12-KWT05D02

► 前锁弯角插座，孔端，非屏蔽，PCB 板接式
Front lock angled receptacle, hole end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
4	A	M12*1.0	INT13-M12-WZ04A01
5	A	M12*1.0	INT13-M12-WZ05A01
8	A	M12*1.0	INT13-M12-WZ08A01
12	A	M12*1.0	INT13-M12-WZ12A01
4	B	M12*1.0	INT13-M12-WZ04B01
5	B	M12*1.0	INT13-M12-WZ05B01
4	D	M12*1.0	INT13-M12-WZ04D01
5	D	M12*1.0	INT13-M12-WZ05D01

► 前锁弯角插座，针端，非屏蔽，PCB 板接式
Front locking angled receptacle, pin end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
4	A	M12*1.0	INT13-M12-WZ04A02
5	A	M12*1.0	INT13-M12-WZ05A02
8	A	M12*1.0	INT13-M12-WZ08A02
12	A	M12*1.0	INT13-M12-WZ12A02
4	B	M12*1.0	INT13-M12-WZ04B02
5	B	M12*1.0	INT13-M12-WZ05B02
4	D	M12*1.0	INT13-M12-WZ04D02
5	D	M12*1.0	INT13-M12-WZ05D02

► 前锁法兰座，针端，非屏蔽，PCB 板接式
Front locking flange, pin-end, unshielded, PCB mount-mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A23
3	A	M16*1.5	INT13-M12-Z03A31
4	A	PG9	INT13-M12-Z04A23
4	A	M16*1.5	INT13-M12-Z04A31
5	A	PG9	INT13-M12-Z05A23
5	A	M16*1.5	INT13-M12-Z05A31
8	A	PG9	INT13-M12-Z08A23
8	A	M16*1.5	INT13-M12-Z08A31

► 后锁法兰座，针端，非屏蔽，PCB 板接式
Rear locking flange, pin end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A13
3	A	M16*1.5	INT13-M12-Z03A15
4	A	PG9	INT13-M12-Z04A13
4	A	M16*1.5	INT13-M12-Z04A15
5	A	PG9	INT13-M12-Z05A13
5	A	M16*1.5	INT13-M12-Z05A15
8	A	PG9	INT13-M12-Z08A13
8	A	M16*1.5	INT13-M12-Z08A15

► 前锁法兰座，孔端，非屏蔽，PCB 板接式
Front locking flange, hole end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A11
3	A	M16*1.5	INT13-M12-Z03A37
4	A	PG9	INT13-M12-Z04A11
4	A	M16*1.5	INT13-M12-Z04A37
5	A	PG9	INT13-M12-Z05A11
5	A	M16*1.5	INT13-M12-Z05A37
8	A	PG9	INT13-M12-Z08A11
8	A	M16*1.5	INT13-M12-Z08A37

► 后锁法兰座，孔端，非屏蔽，PCB 板接式
Rear locking flange, hole end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A12
3	A	M16*1.5	INT13-M12-Z03A36
4	A	PG9	INT13-M12-Z04A12
4	A	M16*1.5	INT13-M12-Z04A36
5	A	PG9	INT13-M12-Z05A12
5	A	M16*1.5	INT13-M12-Z05A36
8	A	PG9	INT13-M12-Z08A12
8	A	M16*1.5	INT13-M12-Z08A36

► 后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange seat, pin end, unshielded, soldered



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	M12*1.0	INT13-M12-Z03A04
4	A	M12*1.0	INT13-M12-Z04A04
5	A	M12*1.0	INT13-M12-Z05A04
8	A	M12*1.0	INT13-M12-Z08A04

► 后锁法兰座，针端，非屏蔽，PCB 板接式
Rear locking flange, pin end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	M12*1.0	INT13-M12-Z03A14
4	A	M12*1.0	INT13-M12-Z04A14
5	A	M12*1.0	INT13-M12-Z05A14
8	A	M12*1.0	INT13-M12-Z08A14

► 后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange seat, pin end, unshielded, soldered



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A18
3	A	M16*1.5	INT13-M12-Z03A38
4	A	PG9	INT13-M12-Z04A18
4	A	M16*1.5	INT13-M12-Z04A38
5	A	PG9	INT13-M12-Z05A18
5	A	M16*1.5	INT13-M12-Z05A38
8	A	PG9	INT13-M12-Z08A18
8	A	M16*1.5	INT13-M12-Z08A38

► 后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange seat, pin end, unshielded, soldered



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A03
3	A	M16*1.5	INT13-M12-Z03A16
4	A	PG9	INT13-M12-Z04A03
4	A	M16*1.5	INT13-M12-Z04A16
5	A	PG9	INT13-M12-Z05A03
5	A	M16*1.5	INT13-M12-Z05A16
8	A	PG9	INT13-M12-Z08A03
8	A	M16*1.5	INT13-M12-Z08A16

► 后锁法兰座，孔端，非屏蔽，焊接式
Rear locking flange seat,hole end,unshielded,welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
4	A	PG9	INT13-M12-Z04A92
4	A	M12*1.0	INT13-M12-Z04A34D
5	A	PG9	INT13-M12-Z05A92
5	A	M12*1.0	INT13-M12-Z05A34D
8	A	PG9	INT13-M12-Z08A17
8	A	M12*1.0	INT13-M12-Z08A34D
12	A	M12*1.0	INT13-M12-Z12A34D
8	A	M16*1.5	INT13-M12-Z08A31A
17	A	PG9	INT13-M12-Z17A17
17	A	M12*1.0	INT13-M12-Z17A34D

► 前锁法兰座，孔端，非屏蔽，焊接式
Front locking flange,hole end,unshielded,welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A01
4	A	PG9	INT13-M12-Z04A01
5	A	PG9	INT13-M12-Z05A01
8	A	PG9	INT13-M12-Z08A01

► 后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange seat,pin end,unshielded,welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
4	A	PG9	INT13-M12-Z04A49
4	A	M12*1.0	INT13-M12-Z04A04B
8	A	M12*1.0	INT13-M12-Z08A04A
17	A	PG9	INT13-M12-Z17A04B
17	A	M12*1.0	INT13-M12-Z17A04A

► 后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange seat,pin end,unshielded,welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
4	A	M16*1.5	INT13-M12-Z04A05A
5	A	M16*1.5	INT13-M12-Z05A05B

► 后锁法兰座，孔端，非屏蔽，焊接式
Rear locking flange seat, hole end, unshielded, welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	M12*1.0	INT13-M12-Z03A34
4	A	M12*1.0	INT13-M12-Z04A34
5	A	M12*1.0	INT13-M12-Z05A34
8	A	M12*1.0	INT13-M12-Z08A34

► 后锁法兰座，针端，非屏蔽，PCB 板接式
Rear locking flange, pin end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	M12*1.0	INT13-M12-Z03A33
4	A	M12*1.0	INT13-M12-Z04A33
5	A	M12*1.0	INT13-M12-Z05A33
8	A	M12*1.0	INT13-M12-Z08A33

► 前锁法兰座，孔端，非屏蔽，焊接式
Front locking flange, hole end, unshielded, welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A09
3	A	M16*1.5	INT13-M12-Z03A35
4	A	PG9	INT13-M12-Z04A09
4	A	M16*1.5	INT13-M12-Z04A35
5	A	PG9	INT13-M12-Z05A09
5	A	M16*1.5	INT13-M12-Z05A35
8	A	PG9	INT13-M12-Z08A09
8	A	M16*1.5	INT13-M12-Z08A35

► 后锁法兰座，孔端，非屏蔽，焊接式
Rear locking flange seat, hole end, unshielded, welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	PG9	INT13-M12-Z03A02
3	A	M16*1.5	INT13-M12-Z03A32
4	A	PG9	INT13-M12-Z04A02
4	A	M16*1.5	INT13-M12-Z04A32
5	A	PG9	INT13-M12-Z05A02
5	A	M16*1.5	INT13-M12-Z05A32
8	A	PG9	INT13-M12-Z08A02
8	A	M16*1.5	INT13-M12-Z08A32

▶ 塑料前锁法兰座，孔端，非屏蔽，焊接式
Rear locking flange seat, hole end, unshielded, welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
2	A	M16*1.5	INT13-M12-Z02A69
4	A	M16*1.5	INT13-M12-Z04A69

▶ 塑料后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange, pin end, unshielded,welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
2	A	M16*1.5	INT13-M12-Z02A05
4	A	M16*1.5	INT13-M12-Z04A05C
5	A	M16*1.5	INT13-M12-Z05A05A
6	A	M16*1.5	INT13-M12-Z06A05
7	A	M16*1.5	INT13-M12-ZS07A02
8	A	M16*1.5	INT13-M12-Z08A05A
12	A	M16*1.5	INT13-M12-Z12A05A

▶ 塑料前锁法兰座，针端，非屏蔽，焊接式
Front locking flange, hole end, unshielded, welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	M16*1.5	INT13-M12-ZS03A03
3	A	PG9	INT13-M12-ZS03A05
4	A	M16*1.5	INT13-M12-ZS04A03
4	A	PG9	INT13-M12-ZS04A05
5	A	M16*1.5	INT13-M12-ZS05A03
5	A	PG9	INT13-M12-ZS05A05
8	A	M16*1.5	INT13-M12-ZS08A03
8	A	PG9	INT13-M12-ZS08A05

▶ 塑料后锁法兰座，孔端，非屏蔽，焊接式
Rear locking flange seat, hole end, unshielded, welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
3	A	M16*1.5	INT13-M12-ZS03A04
3	A	PG9	INT13-M12-ZS03A06
4	A	M16*1.5	INT13-M12-ZS04A04
4	A	PG9	INT13-M12-ZS04A06
5	A	M16*1.5	INT13-M12-ZS05A04
5	A	PG9	INT13-M12-ZS05A06
8	A	M16*1.5	INT13-M12-ZS08A04
8	A	PG9	INT13-M12-ZS08A06

▶ 前锁法兰座，针端，PCB 板接式
Rear locking flange seat, pin end, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
17	A	PG9	INT13-M12-Z17A23L

▶ 前锁法兰座，孔端，PCB 板接式
Rear locking flange, hole end, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
5	A	PG9	INT13-M12-Z05A56
8	A	PG9	INT13-M12-Z08A56

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount

针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
8	X	PG9	INT13-M12-Z08X04A

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
8	X	PG9	INT13-M12-Z08X06

▶ 分体式法兰座，孔端，屏蔽，PCB 板接式
Split flange mount, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-Z04D115
8	X	INT13-M12-Z08X115

▶ 分体式法兰座，针端，屏蔽，PCB 板接式
Split flange mount, pin end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-Z04A127
5	A	INT13-M12-Z05A127

▶ 直角插座，针端，屏蔽，PCB 板接式
Right angle receptacle, pin end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-LZ04A01
5	A	INT13-M12-LZ05A01
8	A	INT13-M12-LZ08A01
4	B	INT13-M12-LZ04B01
5	B	INT13-M12-LZ05B01
4	D	INT13-M12-LZ04D01
5	D	INT13-M12-LZ05D01

▶ 直角插座，孔端，屏蔽，PCB 板接式
Right angle receptacle, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-LZ04A02
5	A	INT13-M12-LZ05A02
8	A	INT13-M12-LZ08A02
4	B	INT13-M12-LZ04B02
5	B	INT13-M12-LZ05B02
4	D	INT13-M12-LZ04D02
5	D	INT13-M12-LZ05D02

▶ 贴片式插座，孔端，屏蔽，PCB 板接式
SMD socket, socket end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-TP08X02

▶ 贴片式插座，孔端，屏蔽，PCB 板接式
SMD socket, socket end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-TP04A02K
4	D	INT13-M12-TP04D02K

▶ 贴片式插座，针端，屏蔽，PCB 板接式
SMD socket, pin-ended, shielded, PCB



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-TP04A01K
5	A	INT13-M12-TP05A01K

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-Z04D142
5	D	INT13-M12-Z05D142

▶ 前锁法兰座，针端，PCB 板接式
Front locking flange seat, pin end, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	K	INT13-M12-Z05K01

▶ 前锁法兰座，孔端，PCB 板接式
Front locking flange seat, hole end, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	K	INT13-M12-Z05K02

▶ 前锁法兰座，孔端，PCB 板接式
Front locking flange seat, hole end, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	S	INT13-M12-Z04S06

▶ 前锁法兰座，针端，屏蔽，PCB 板接式
Front locking flange seat, pin end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
6	Y	INT13-M12-Z06Y01
8	Y	INT13-M12-Z08Y01

▶ 浇铸电缆插头，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
6	Y	INT13-M12-Z06Y02
8	Y	INT13-M12-Z08Y02

▶ 前锁法兰座，针端，屏蔽，焊接式
Front locking flange seat, pin end, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X01

▶ 前锁法兰座，孔端，屏蔽，焊接式
Front locking flange seat, hole end, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X02B

▶ 前锁法兰座，针端，屏蔽，PCB 板接式
Front locking flange seat, pin end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-ZT04A01
5	A	INT13-M12-ZT05A01
8	A	INT13-M12-ZT08A01
12	A	INT13-M12-ZT12A01
17	A	INT13-M12-ZT17A01
4	B	INT13-M12-ZT04B01
5	B	INT13-M12-ZT05B01
4	D	INT13-M12-ZT04D01
5	D	INT13-M12-ZT05D01

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-ZT04A02
5	A	INT13-M12-ZT05A02
8	A	INT13-M12-ZT08A02
12	A	INT13-M12-ZT12A02
17	A	INT13-M12-ZT17A02
4	B	INT13-M12-ZT04B02
5	B	INT13-M12-ZT05B02
4	D	INT13-M12-ZT04D02
5	D	INT13-M12-ZT05D02

▶ 分体式插座，孔端，屏蔽，PCB 板接式
Split receptacle, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-ZT04D04
8	X	INT13-M12-ZT08X02

▶ 前锁法兰座，针端，PCB 板接式
Front locking flange seat, pin end, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	L	INT13-M12-Z05L01

▶ 前锁法兰座，孔端，PCB 板接式
Front locking flange seat, hole end, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
5	L	INT13-M12-Z05L02

▶ 前锁法兰座，孔端，非屏蔽，PCB 板接式，推拉自锁式
Front locking flange, hole end, unshielded, PCB board mount, push-pull self-locking



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-PZ04D01

▶ 前锁法兰座，孔端，非屏蔽，焊接式
Front locking flange,hole end,unshielded,welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	S	INT13-M12-Z04S02
4	T	INT13-M12-Z04T02

▶ 后锁法兰座，针端，非屏蔽，焊接式
Rear locking flange seat, pin end,unshielded,welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	S	INT13-M12-Z04S03
4	T	INT13-M12-Z04T01A

▶ 前锁法兰座，针端，非屏蔽，焊接式
Front locking flange, pin end,unshielded,welded



针数 Cant acts	编码 Coding	螺纹规格 Fixing thread	订货号 Ordering-No.
4	S	M16*1.5	INT13-M12-Z04S03A
4	T	M16*1.5	INT13-M12-Z04T05
4	T	PG9	INT13-M12-Z04T03

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式，推拉自锁式
Front locking flange, hole end, shielded, PCB board mount, push-pull self-locking



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-PZ08X02

▶ 方盘座，针端，非屏蔽，焊接式
Square disc holder, pin-end, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-Z04A107
5	A	INT13-M12-Z05A107
8	A	INT13-M12-Z08A107

▶ 方盘座，孔端，非屏蔽，PCB 板接式
Square disc holder, hole end, unshielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-Z04A120
5	A	INT13-M12-Z05A120
8	A	INT13-M12-Z08A120

▶ RJ45 浇铸插座，孔端，非屏蔽，焊接式
RJ45 cast receptacle, hole end, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-Z04A144
5	A	INT13-M12-Z05A144
8	A	INT13-M12-Z08A144

▶ RJ45 浇铸插座，针端，非屏蔽，焊接式
RJ45 cast socket, pin ded, unshielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	A	INT13-M12-Z04A145
5	A	INT13-M12-Z05A145
8	A	INT13-M12-Z08A145

▶ RJ45 浇铸插座，针端，屏蔽，焊接式
RJ45 cast socket, pin end, shielded, soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X07

▶ RJ45 浇铸插座，孔端，屏蔽，焊接式
RJ45 Cast Receptacle, Hole End, Shielded, Soldered



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X12

▶ 弯角插座，孔端，屏蔽，PCB 板接式
Angled sockets, hole ends, shielded, PCB board mounts



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-WZ04D06

▶ 分体式弯角插座，孔端，屏蔽，PCB 板接式
Split corner receptacle, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-WZ08X04

▶ 前锁弯角插座，孔端，屏蔽，PCB 板接式
Front locking angled receptacle, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
4	D	INT13-M12-WZ04D03A

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X09

▶ 前锁法兰座，孔端，屏蔽，PCB 板接式
Front locking flange, hole end, shielded, PCB board mount



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X37

▶ 前锁法兰座，孔端，屏蔽，焊接式
Front locking flange seat, hole end, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X02

▶ 前锁法兰座，孔端，屏蔽，焊接式
Front locking flange seat, hole end, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-Z08X02A

M12 螺纹防水连接器

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-T08X01

▶ 浇铸电缆插头，孔端，屏蔽，焊接式
Cast cable plugs, hole ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-T08X02

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded

针数 Cant acts	编码 Coding	订货号 Ordering-No.
6	Y	INT13-M12-T06Y01
8	Y	INT13-M12-T08Y01

▶ 浇铸电缆插头，孔端，屏蔽，焊接式
Cast cable plugs, hole ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
6	Y	INT13-M12-T06Y02
8	Y	INT13-M12-T08Y02

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-T08X01D-03

▶ 浇铸电缆插头，针端，屏蔽，焊接式
Cast cable plugs, pin ends, shielded, welded



针数 Cant acts	编码 Coding	订货号 Ordering-No.
8	X	INT13-M12-T08X01D-03A

▶ 浇铸电缆连接器，孔，螺纹系列，M12*1
Cast cable connector, hole, thread series, M12*1



针数 Cant acts	电缆规格 Cabel	材质 Material	订货号 Ordering-No.
3	3*0.34	PVC	INT13-L12-LT03A02-XX-*
3	3*0.34	PUR	INT13-L12-LT03A02-XX-*
4	4*0.34	PVC	INT13-L12-LT04A02-XX-*
4	4*0.34	PUR	INT13-L12-LT04A02-XX-*
5	5*0.34	PVC	INT13-L12-LT05A02-XX-*
5	5*0.34	PUR	INT13-L12-LT05A02-XX-*
8	8*0.34	PVC	INT13-L12-LT08A02-XX-*
8	8*0.34	PUR	INT13-L12-LT08A02-XX-*
12	12*0.34	PVC	INT13-L12-LT12A02-XX-*
12	12*0.34	PUR	INT13-L12-LT12A02-XX-*

▶ 浇铸电缆连接器，孔，螺纹系列，M12*1
Cast cable connector, hole, thread series, M12*1



针数 Cant acts	电缆规格 Cabel	材质 Material	订货号 Ordering-No.
3	3*0.34	PVC	INT13-W12-LT03A02-XX-*
3	3*0.34	PUR	INT13-W12-LT03A02-XX-*
4	4*0.34	PVC	INT13-W12-LT04A02-XX-*
4	4*0.34	PUR	INT13-W12-LT04A02-XX-*
5	5*0.34	PVC	INT13-W12-LT05A02-XX-*
5	5*0.34	PUR	INT13-W12-LT05A02-XX-*
8	8*0.34	PVC	INT13-W12-LT08A02-XX-*
8	8*0.34	PUR	INT13-W12-LT08A02-XX-*
12	12*0.34	PVC	INT13-W12-LT12A02-XX-*
12	12*0.34	PUR	INT13-W12-LT12A02-XX-*

▶ 浇铸电缆连接器，针，螺纹系列，M12*1
Cast cable connector, pin, thread series, M12*1



针数 Cant acts	电缆规格 Cabel	材质 Material	订货号 Ordering-No.
3	3*0.34	PVC	INT13-L12-LT03A01-XX-*
3	3*0.34	PUR	INT13-L12-LT03A01-XX-*
4	4*0.34	PVC	INT13-L12-LT04A01-XX-*
4	4*0.34	PUR	INT13-L12-LT04A01-XX-*
5	5*0.34	PVC	INT13-L12-LT05A01-XX-*
5	5*0.34	PUR	INT13-L12-LT05A01-XX-*
8	8*0.34	PVC	INT13-L12-LT08A01-XX-*
8	8*0.34	PUR	INT13-L12-LT08A01-XX-*
12	12*0.34	PVC	INT13-L12-LT12A01-XX-*
12	12*0.34	PUR	INT13-L12-LT12A01-XX-*

▶ 浇铸电缆连接器，针，螺纹系列，M12*1
Cast cable connector, pin, thread series, M12*1



针数 Cant acts	电缆规格 Cabel	材质 Material	订货号 Ordering-No.
3	3*0.34	PVC	INT13-W12-LT03A01-XX-*
3	3*0.34	PUR	INT13-W12-LT03A01-XX-*
4	4*0.34	PVC	INT13-W12-LT04A01-XX-*
4	4*0.34	PUR	INT13-W12-LT04A01-XX-*
5	5*0.34	PVC	INT13-W12-LT05A01-XX-*
5	5*0.34	PUR	INT13-W12-LT05A01-XX-*
8	8*0.34	PVC	INT13-W12-LT08A01-XX-*
8	8*0.34	PUR	INT13-W12-LT08A01-XX-*
12	12*0.34	PVC	INT13-W12-LT12A01-XX-*
12	12*0.34	PUR	INT13-W12-LT12A01-XX-*